



Progressing Cavity Pump
WANGEN polymer pump

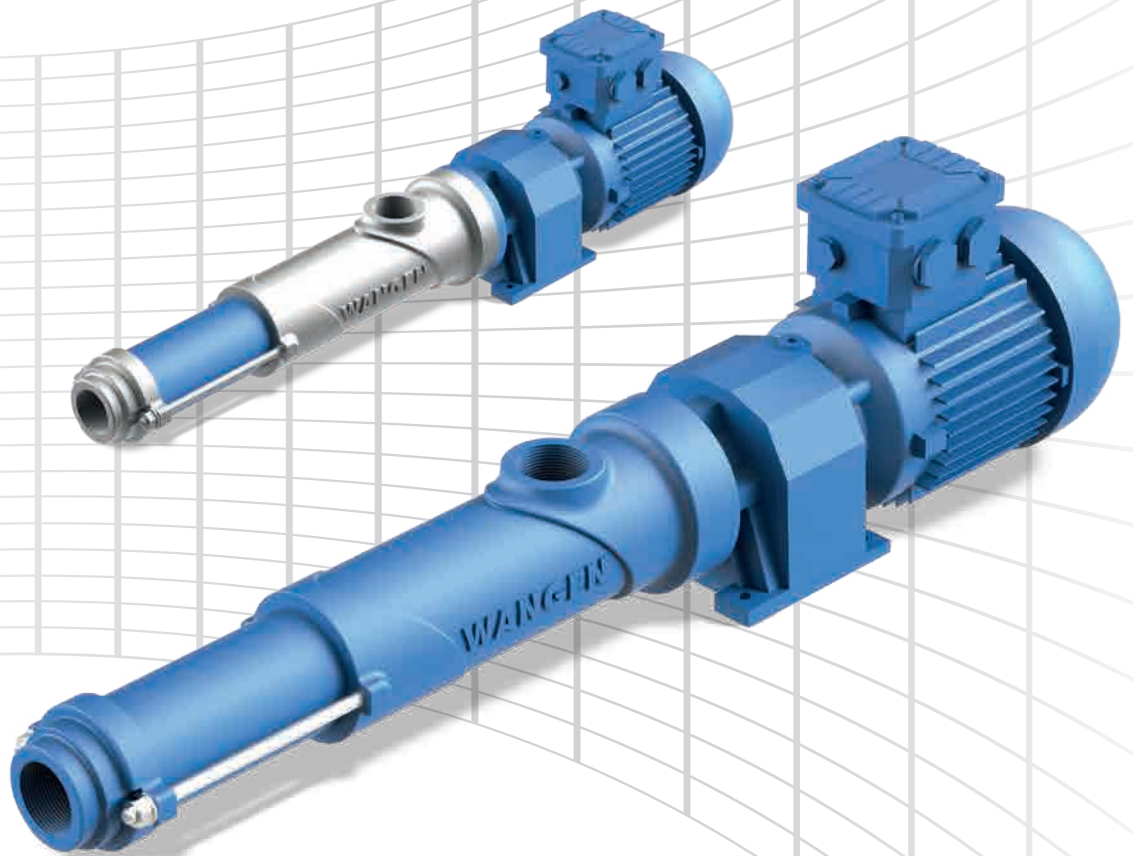

For conveying and dosing in
waste water treatment plants and
chemical & pharmaceutical industry.

WANGEN polymer pump For reliable conveying and dosing

Pump size	Maximum completely free passage (mm)	Flowrate (l/h)	Maximum differential pressure (bar)
10	12	0,5 up to 200	16
20	28	200 up to 4.000	16

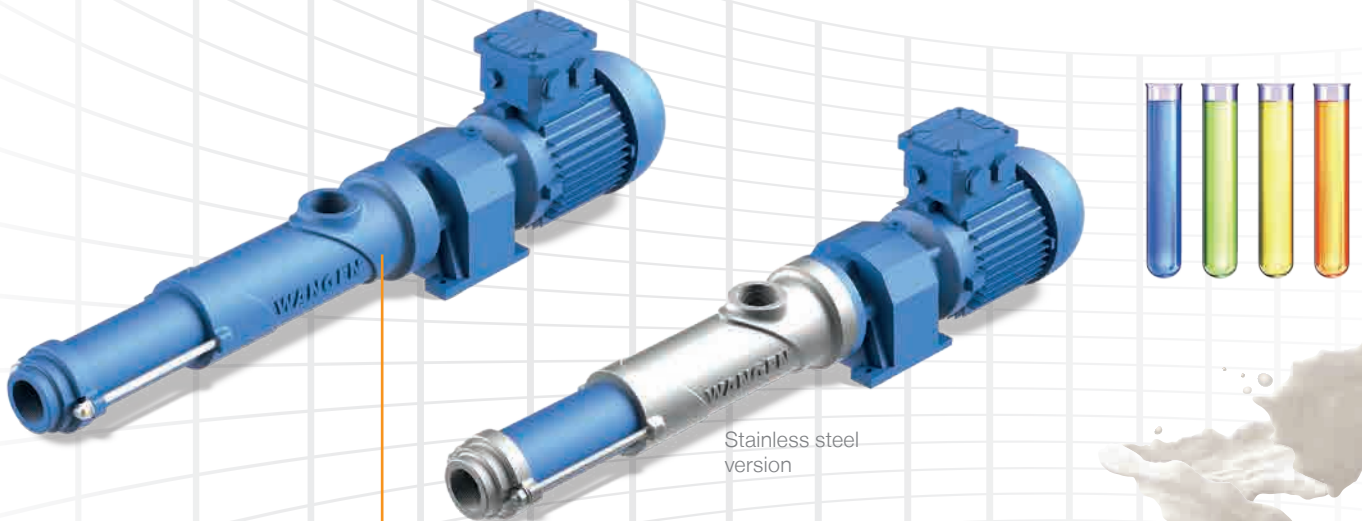

Stainless steel version

Characteristics:

- Housing in cast iron, stainless steel or **plastic material** available
- Long-lasting, wear- and maintenance-free flexible joint **without oil filling** (prevents contamination of the media)
- Large dosing range
- Dosing accuracy $\pm 1\%$
- Intelligent design

Conveying media:

- Polymer solutions and viscous polymer concentrates
- Additives such as precipitants and flocculants
- Urea, catalyst liquid
- Aggressive and non-aggressive chemicals
- Oil, lubricants
- Paints and liquid pigments
- Adhesives, sealants

